


Grilli tranciati

CONFEZIONE 20 PZ.
BOX 20 PCS

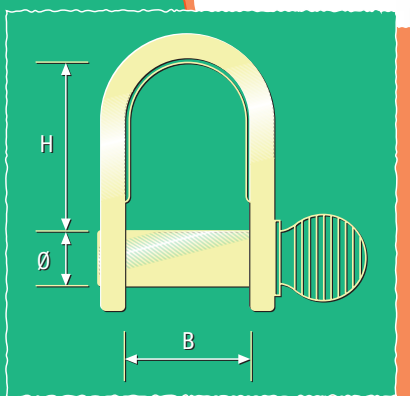

| Art. | Ø | | B | | H | | Carico di rottura Kg Breaking load Kg |
|-------|----|------|----|-------|----|-------|--|
| | mm | IN. | mm | IN. | mm | IN. | |
| 27.01 | 4 | 5/32 | 10 | 3/8 | 15 | 9/16 | 700 |
| 27.02 | 4 | 5/32 | 12 | 1/2 | 24 | 15/16 | 700 |
| 27.03 | 5 | 3/16 | 12 | 1/2 | 17 | 11/16 | 1.050 |
| 27.04 | 5 | 3/16 | 16 | 5/8 | 25 | 1 | 1.050 |
| 27.05 | 5 | 3/16 | 14 | 9/16 | 40 | 19/16 | 1.050 |
| 27.06 | 5 | 3/16 | 22 | 7/8 | 37 | 17/16 | 1.050 |
| 27.07 | 6 | 1/4 | 16 | 5/8 | 21 | 13/16 | 2.050 |
| 27.08 | 6 | 1/4 | 17 | 11/16 | 26 | 1 | 2.050 |
| 27.09 | 6 | 1/4 | 14 | 9/16 | 28 | 11/16 | 2.050 |
| 27.40 | 6 | 1/4 | 13 | 1/2 | 21 | 13/16 | 2.050 |

Grilli ritorti

Twisted shackles

CONFEZIONE 20 PZ.
BOX 20 PCS

| Art. | Ø | | B | | H | | Carico di rottura Kg Breaking load Kg |
|-------|----|------|----|------|----|-------|--|
| | mm | IN. | mm | IN. | mm | IN. | |
| 27.10 | 4 | 5/32 | 11 | 7/16 | 22 | 7/8 | 550 |
| 27.11 | 5 | 3/16 | 12 | 1/2 | 37 | 17/16 | 1.050 |

Grilli con pernetto e anellino Clevis pin shackles

CONFEZIONE 20 PZ.
BOX 20 PCS

| Art. | Ø | | B | | H | | Carico di rottura Kg Breaking load Kg |
|-------|----|------|------|-------|------|-------|--|
| | mm | IN. | mm | IN. | mm | IN. | |
| 27.12 | 4 | 5/32 | 10 | 3/8 | 15 | 9/16 | 700 |
| 27.13 | 4 | 5/32 | 12 | 1/2 | 24 | 15/16 | 700 |
| 27.14 | 5 | 3/16 | 12 | 1/2 | 17 | 11/16 | 1.050 |
| 27.15 | 5 | 3/16 | 16 | 5/8 | 25 | 1 | 1.050 |
| 27.16 | 5 | 3/16 | 22 | 7/8 | 37 | 17/16 | 1.050 |
| 27.17 | 6 | 1/4 | 16 | 5/8 | 21 | 13/16 | 2.050 |
| 27.18 | 6 | 1/4 | 17 | 11/16 | 26 | 1 | 2.050 |
| 27.19 | 6 | 1/4 | 14 | 9/16 | 28 | 11/16 | 2.050 |
| 27.34 | 4 | 5/32 | 10 | 3/8 | 14 | 9/16 | 600 |
| 27.35 | 5 | 3/16 | 11,5 | 29/64 | 14,5 | 9/16 | 800 |

Grilli a scatto con perno imperdibile Key pin shackles

CONFEZIONE 20 PZ.
BOX 20 PCS

| Art. | Ø | | B | | H | | Carico di rottura Kg Breaking load Kg |
|-------|----|------|----|------|----|-------|--|
| | mm | IN. | mm | IN. | mm | IN. | |
| 27.25 | 5 | 3/16 | 14 | 9/16 | 40 | 19/16 | Kg 1.050 |
| 27.26 | 5 | 3/16 | 14 | 9/16 | 40 | 19/16 | Kg 1.050 |

Shackles

