




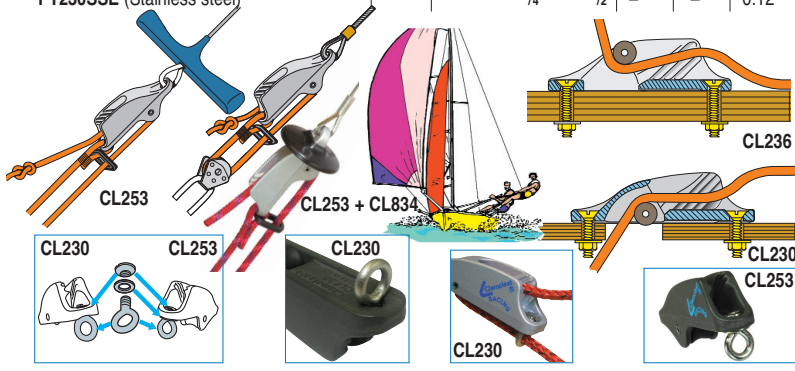





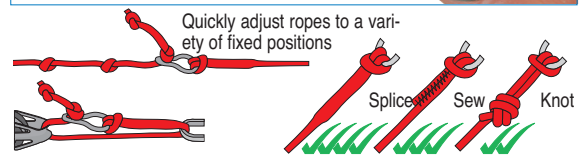







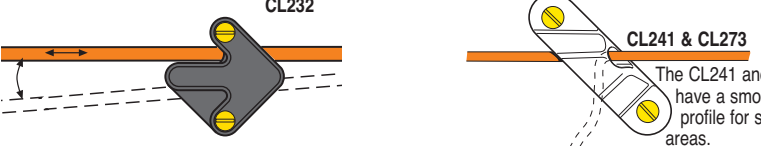
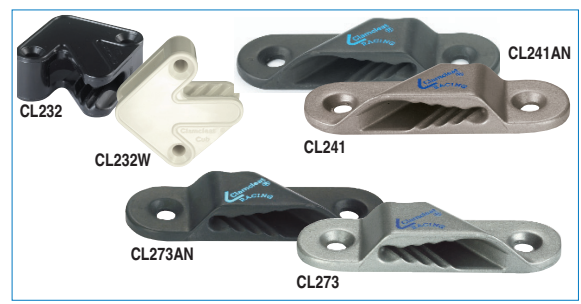
Roller Cleats					mm inch			
		mm Ø inch Ø	A	B				
Roller Fairlead White Junior CL203W/S1 (Nylon)	3 - 6 1/8-1/4	82 3 1/4	66 2 5/8	18 1 1/16	M4 #8	4.2 No8	17 0.6	
White Junior with Roller CL203W/S2 (Nylon)	3 - 6 1/8-1/4	82 3 1/4	66 2 5/8	18 1 1/16	M4 #8	4.2 No8	17 0.6	
Racing Junior Mk1 with Roller CL230	3 - 6 1/8-1/4	82 3 1/4	66 2 5/8	18 1 1/16	M5 #10	4.8 No10	35 1.2	
CL230AN (Aluminium)	3 - 6 1/8-1/4	82 3 1/4	66 2 5/8	18 1 1/16	M5 #10	4.8 No10	40 1.4	
Roller Fairlead Mk1 Racing Junior CL236	3 - 6 1/8-1/4	82 3 1/4	66 2 5/8	18 1 1/16	M5 #10	4.8 No10	46 1.6	
CL236AN (Aluminium)	3 - 6 1/8-1/4	82 3 1/4	66 2 5/8	18 1 1/16	M5 #10	4.8 No10	46 1.6	
Trapeze and Vang Cleat CL253	4 - 8 5/32-5/16	89 3 1/2	70 2 3/4	18 1 1/16	-	-	6.5 0.23	
CL253AN (Aluminium)	4 - 8 5/32-5/16	89 3 1/2	70 2 3/4	18 1 1/16	-	-	6.5 0.23	
Handle for CL253 Trapeze Cleat CL834 (Polypropylene)	-	-	-	50 1 31/32	-	-	6.5 0.23	
Eye for CL230 & CL253 PT230SSE (Stainless steel)	-	-	6 1/4	12 1/2	-	-	3.3 0.12	








Q-Lok					mm inch			
		mm Ø inch Ø	A	B				
Q-Lok CL5001 (Stainless steel)	3 - 4 1/8-5/32	33 1 5/16	-	20 3/4	-	-	5 0.2	



Cub & Sail Line Cleats					mm inch			
		mm Ø inch Ø	A	B				
Cub Cleat CL232	3 - 6 1/8-1/4	46 1 13/16	35 1 3/8	46 1 13/16	M4 #8	4.2 No8	13 0.5	
CL232W (Nylon)	3 - 6 1/8-1/4	46 1 13/16	35 1 3/8	46 1 13/16	M4 #8	4.2 No8	13 0.5	
Racing Sail Line Cleat (Port) CL241	3 - 6 1/8-1/4	70 2 3/4	49 1 15/16	21 13/16	M4 #8	4.2 No8	16 0.6	
CL241AN (Aluminium)	3 - 6 1/8-1/4	70 2 3/4	49 1 15/16	21 13/16	M4 #8	4.2 No8	16 0.6	
Racing Sail Line Cleat (Starboard) CL273	3 - 6 1/8-1/4	70 2 3/4	49 1 15/16	21 13/16	M4 #8	4.2 No8	16 0.6	
CL273AN (Aluminium)	3 - 6 1/8-1/4	70 2 3/4	49 1 15/16	21 13/16	M4 #8	4.2 No8	16 0.6	



The CL241 and CL273 have a smooth low profile for snag free areas.

Omega Cleat					mm inch			
		mm Ø inch Ø	A	B				
Omega Cleat CL255	3 - 6 1/8-1/4	46 1 13/16	27 1 1/16	43 1 11/16	M4 #8	4.2 No8	28 1.0	
CL255AN (Aluminium)	3 - 6 1/8-1/4	46 1 13/16	27 1 1/16	43 1 11/16	M4 #8	4.2 No8	28 1.0	

