


DIN 6921

ISO 4162



Болт с шестигранной головкой и фланцем
Нержавеющая сталь A2 (AISI 304)

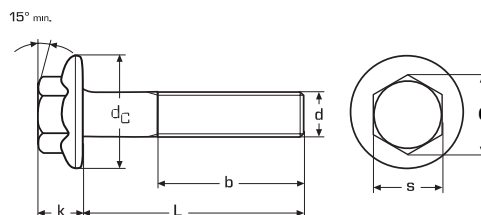


dc	14,2	18,0
k	6,6	8,1
s	10,0	13,0
e	10,95	14,26
b	18,0	22,0

d	M 6	M 8
10	0,646	
12	0,692	
16	0,748	1,435
20	0,804	1,558
25	0,917	1,712
30	1,127	2,225
35	1,230	2,430
40	1,363	2,635
	200	200

Вес 100 шт./кг

DIN 6923

ISO 4161

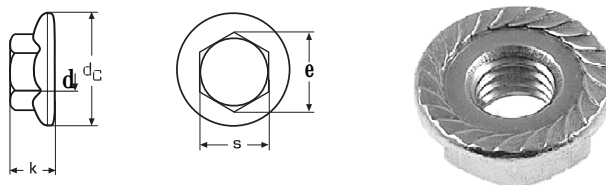

Гайка шестигранная с фланцем
Нержавеющая сталь A2 (AISI 304)/A4 (AISI 316)

d	dc	k	e	s
M 4	10,0	4,65	7,66	7,0
M 5	11,8	5,0	8,79	8,0
M 6	14,2	6,0	11,05	10,0
M 8	17,9	8,0	14,38	13,0
M 10	21,8	10,0	16,64	15,0
M 12	26,0	12,0	20,03	18,0