

Cleat for underground recycling bags

mm Ø inch Ø	A B C			mm inch	Gms Ozs
	A	B	C		

Cleat for Recycling bag
CL279 (Nylon)



10 3/8	198 7 3/4	95 3 3/4	55 2 1/8	250 9.0
-----------	--------------	-------------	-------------	------------

This cleat is used for the control rope on semi-buried recycling bag systems, also known as deep collection containers. Supplied complete with backplate and stainless steel M6 fastenings. The fabric of the bag is firmly gripped between the cleat base and backplate.

Ideal for use with our PT414-9 rope, PT413-1 tube and PT406 loops.

See below.

We can supply the fabric bags, please contact us.

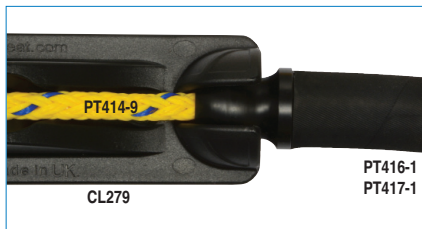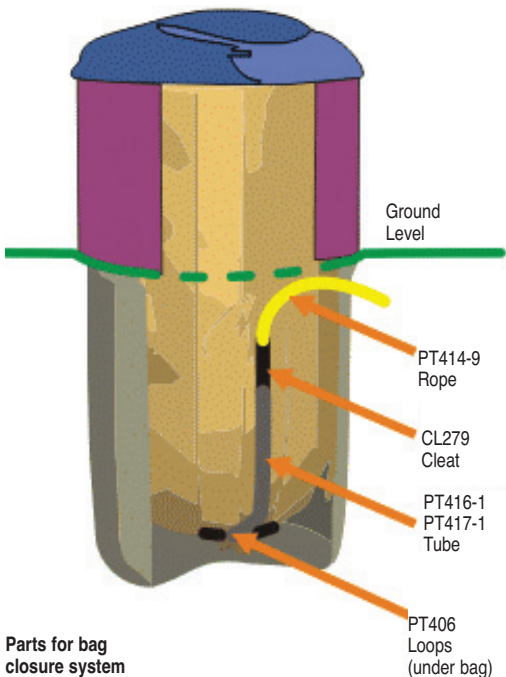

Accessories for recycling bags

mm Ø inch Ø	A B C			mm inch	Gms Ozs
	A	B	C		
—	148 5 13/16	—	93 3 5/8	95 3.4	
8-11 5/16-7/16	1010 40	—	—	410 14	
8-11 5/16-7/16	1010 40	—	—	910 32	
6-10 1/4-3/8	8000 312	—	10 3/8	—	

Loop for use with CL279 Refuse bag cleat
PT406 (Nylon)

Tube assembly 1m long with end fittings
PT416-1 (Fibre reinforced plastic)

Tube assembly 1m long with end fittings
PT417-1 (Steel reinforced synthetic rubber)

Rope, 10mmØ X 8 metres, eye one end
PT414-9 (Polyethylene)

PT406 - Loop for use with CL279 Refuse bag cleat

This rope guide loop is used on semi-buried recycling bag systems.

Requires M5 x 30 caphead screw and M5 nut. Please ask if you would like us to supply these.

PT416-1 - Heavy duty tube assembly. Fibre reinforced plastic hose with end fittings. Totally weather proof. Suitable for sub-zero temperatures. Minimum inside diameter 13mm (1/2").

PT417-1 - Extra heavy duty tube assembly. Steel reinforced synthetic rubber hose with end fittings. Can also be used as a handle. Suitable for sub-zero temperatures. Minimum inside diameter 13mm (1/2").

PT416-1 and PT417-1 hoses are designed for use with our CL279 cleat, PT414-9 rope and PT406 loop.

PT414-9 - Yellow rope, with an eye on one end. Overall length 8.1 - 8.15 metres (26 ft). Diameter 10mm (3/8"). 3 strand core with eight plait braided cover.

We specially designed this rope for use with our CL279 cleat. It is strong with low friction and abrasion resistance. The spliced eye has a protective sleeve and is the correct size for use with our PT406 loop.

