






Outhaul the competition

- The CL244 boom cleat allows you to adjust your outhaul while racing, to achieve the ideal sail shape and keep ahead of the competition.
- Rig for a straight pull or 2:1 advantage.
- Alloy cleat for long life.
- A selection of clamps fit booms from 30-43mm (1 1/8"-1 11/16") diameter
- Fits round and vGrip booms.
- Adjust cleat position on the boom to suit your sailing style.

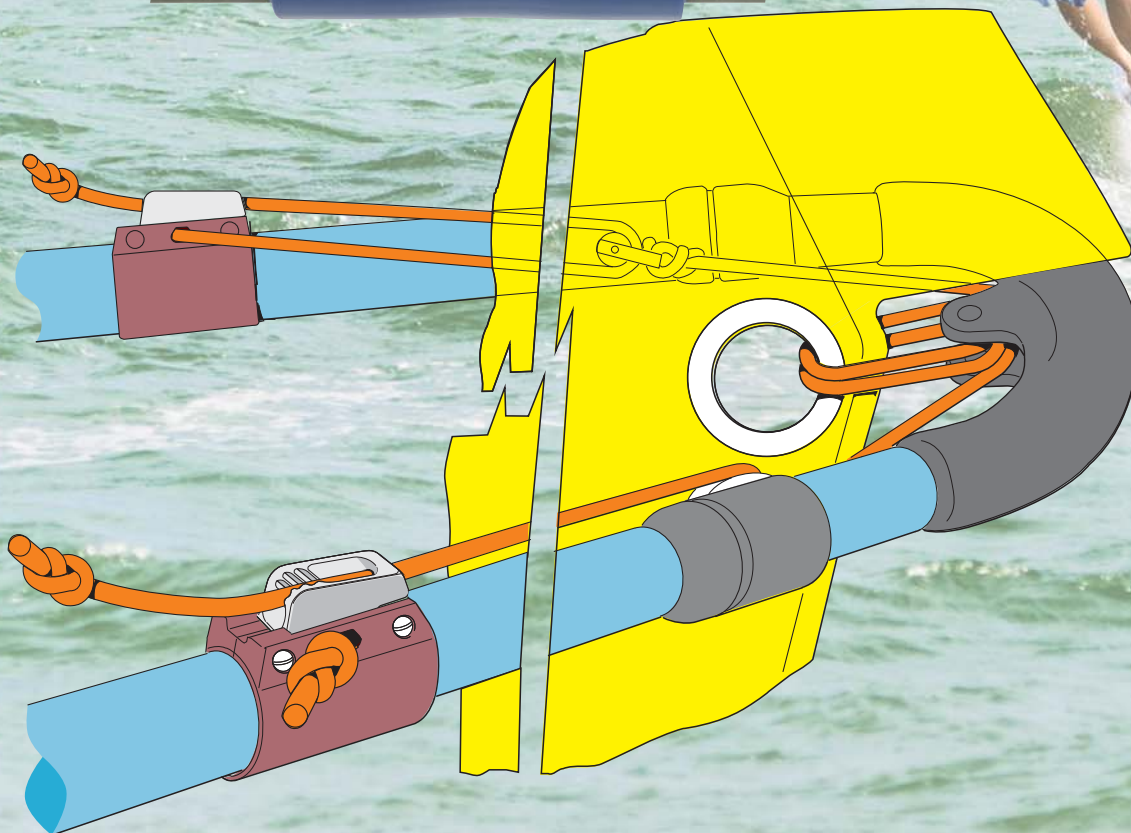

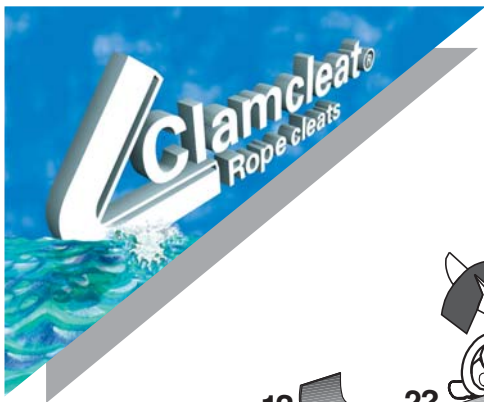

Fitting CL244 with CL105, CL111, CL115 or CL134 clamps?

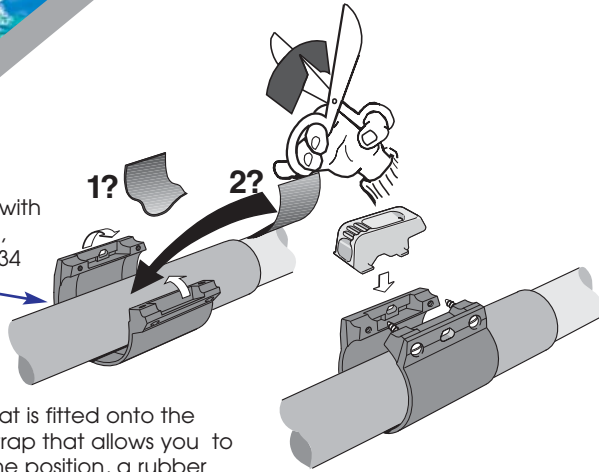

The alloy cleat is fitted onto the boom by a strap that allows you to personalise the position, a rubber packing piece accommodates slight tube differences.



Fits round and vGrip booms



Retail packs are supplied complete with alloy CL244 cleat, CL105 clamp, CL111 clamp, 2 rubber packing pieces, 2 stainless steel screws and an instruction leaflet.

The CL115 and CL134 clamps are purchased separately if required.



Rope Ø
3-5mm
1/8" - 3/16"



CL244+
CL105



CL244+
CL111



CL244+
CL115



CL244+
CL134

Reference	Tube Ø
CL244 cleat + CL105 clamp	30-32mm 1 1/8" - 1 1/4"
CL244 cleat + CL111 clamp	32-35mm 1 1/4" - 1 3/8"
CL244 cleat + CL115 clamp	35-37mm 1 3/8" - 1 7/16"
CL244 cleat + CL134 clamp	42-43mm 1 11/16"