


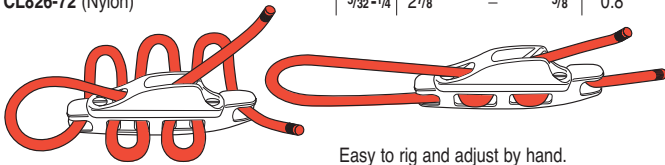





Aero Cleats CL826				mm inch	
mm Ø inch Ø	A	B	C		Gms Ozs
Aero base + CL211Mk2					
Racing Junior	4 - 6	73	—	16	35
CL826-11 (Nylon & Aluminium)	5/32-1/4	27/8	—	5/8	1.2
Aero base + CL211Mk2AN					
Hard Anodised Racing Junior	4 - 6	73	—	16	35
CL826-11AN (Nylon & Aluminium)	5/32-1/4	27/8	—	5/8	1.2
Aero base + CL272Mk2					
Nylon Junior	4 - 6	73	—	16	23
CL826-72 (Nylon)	5/32-1/4	27/8	—	5/8	0.8




Easy to rig and adjust by hand.



Aero Cleats CL827				mm inch	
mm Ø inch Ø	A	B	C		Gms Ozs
Aero base + CL203					
Nylon Junior	4 - 6	112	—	19	43
CL827-03 (Nylon)	5/32-1/4	43/8	—	3/4	1.5
Aero base + CL211Mk1					
Racing Junior	4 - 6	112	—	19	62
CL827-11 (Nylon & Aluminium)	5/32-1/4	43/8	—	3/4	2.2
Aero base + CL211Mk1					
Hard Anodised Racing Junior	4 - 6	112	—	19	62
CL827-11AN (Nylon & Aluminium)	5/32-1/4	43/8	—	3/4	2.2
Aero base + CL217Mk1					
Side entry Racing Junior (Starboard)	4 - 6	112	—	19	59
CL827-17 (Nylon & Aluminium)	5/32-1/4	43/8	—	3/4	2.1
Aero base + CL217 Mk1 Hard Anodised					
Side entry Racing Junior (Starboard)	4 - 6	112	—	19	59
CL827-17AN (Nylon & Aluminium)	5/32-1/4	43/8	—	3/4	2.1
Aero base + CL218Mk1					
Side entry Racing Junior (Port)	4 - 6	112	—	19	59
CL827-18 (Nylon & Aluminium)	5/32-1/4	43/8	—	3/4	2.1
Aero base + CL218 Mk1 Hard Anodised					
Side entry Racing Junior (Port)	4 - 6	112	—	19	59
CL827-18AN (Nylon & Aluminium)	5/32-1/4	43/8	—	3/4	2.1
Aero base + CL236					
Roller Fairlead Racing Junior	4 - 6	112	—	19	69
CL827-36 (Nylon & Aluminium)	5/32-1/4	43/8	—	3/4	2.4
Aero base + CL236 Hard Anodised					
Roller Fairlead Racing Junior	4 - 6	112	—	19	69
CL827-36AN (Nylon & Aluminium)	5/32-1/4	43/8	—	3/4	2.4



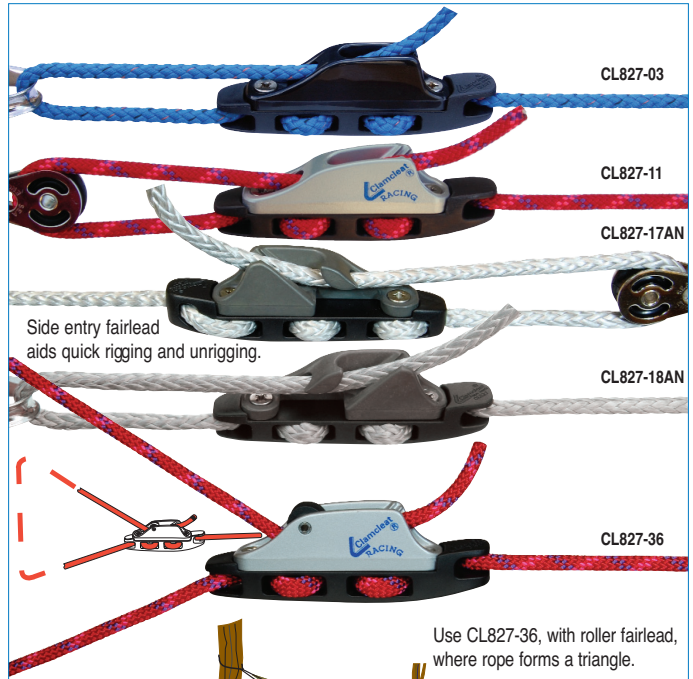


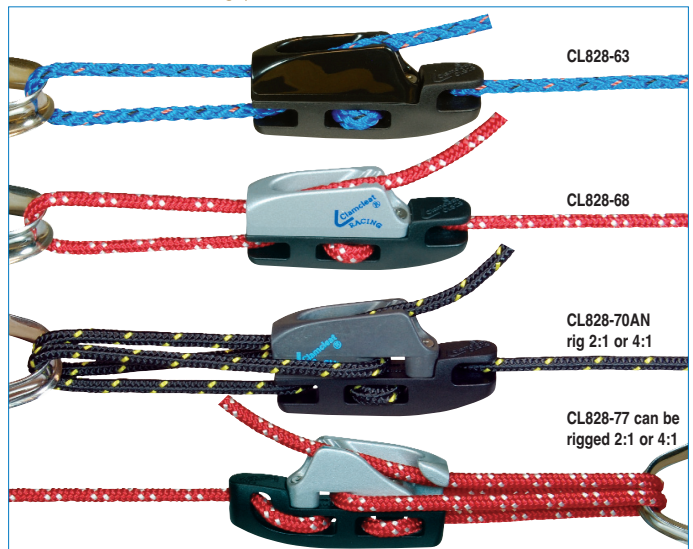
Move cleat along the rope by hand. No tools required.



Side entry fairlead aids quick rigging and unrigging.



Use CL827-36, with roller fairlead, where rope forms a triangle.

Aero Cleats CL828				mm inch	
mm Ø inch Ø	A	B	C		Gms Ozs
Aero base + CL263					
Nylon Micros	3 - 4	60	—	13	15
CL828-63 (Nylon)	1/8-5/32	23/8	—	1/2	0.5
Aero base + CL268					
Racing Micros	3 - 4	60	—	13	21
CL828-68 (Nylon & Aluminium)	1/8-5/32	23/8	—	1/2	0.75
Aero base + CL268					
Hard Anodised Racing Micros	3 - 4	60	—	13	21
CL828-68AN (Nylon & Aluminium)	1/8-5/32	23/8	—	1/2	0.75
Aero base + CL270					
Racing Micros with Becket	3 - 4	60	—	13	24
CL828-70 (Nylon & Aluminium)	1/8-5/32	23/8	—	1/2	0.85
Aero base + CL270 Hard Anodised					
Racing Micros with Becket	3 - 4	60	—	13	24
CL828-70AN (Nylon & Aluminium)	1/8-5/32	23/8	—	1/2	0.85
Aero base + CL277					
Side entry Racing Micros (Starboard)	3 - 4	60	—	13	23
CL828-77 (Nylon & Aluminium)	1/8-5/32	23/8	—	1/2	0.8
Aero base + CL277 Hard Anodised					
Side entry Racing Micros (Starboard)	3 - 4	60	—	13	23
CL828-77AN (Nylon & Aluminium)	1/8-5/32	23/8	—	1/2	0.8



CL828-70AN rig 2:1 or 4:1

CL828-77 can be rigged 2:1 or 4:1

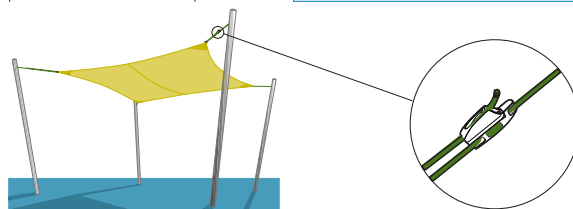

See all the Aero cleats at www.clamcleat.com/aero