

PERFORMANCE ROPE HOLDING



Fairlead cleats for ropes to 4mm (5/32")

	mm Ø inch Ø	A	B	C	mm Ø inch Ø	mm Ø Gauge	Gms Ozs
Micros							
CL263	1 - 4	44	24	13	M3	3.0	4.8
CL263W (Nylon)	3/64-5/32	1 3/4	1 5/16	1/2	#4	No4	0.2
Racing Micros							
CL268	1 - 4	44	24	13	M3	3.0	13
CL268AN (Aluminium)	3/64-5/32	1 3/4	1 5/16	1/2	#4	No4	0.5
Racing Micros with Becket							
CL270	1 - 4	44	24	13	M3	3.0	14
CL270AN (Aluminium)	3/64-5/32	1 3/4	1 5/16	1/2	#4	No4	0.5
Racing Micros Side entry (Starboard) with Becket CL277							
CL277AN (Aluminium)	1 - 4	44	24	14	M3	3.0	12
CL277AN (Aluminium)	3/64-5/32	1 3/4	1 5/16	9/16	#4	No4	0.4
Racing Micros Side entry (Port) with Becket CL278							
CL278AN (Aluminium)	1 - 4	44	24	14	M3	3.0	12
CL278AN (Aluminium)	3/64-5/32	1 3/4	1 5/16	9/16	#4	No4	0.4
Tapered Pad for all Micros cleats		47	-	19	-	-	4
CL823 (Polypropylene)	-	1 19/16	-	3/4	-	-	0.15



Rigging for CL270, CL270AN, CL277, CL277AN, CL278 and CL278AN.

Riveting the CL211 Mk2 or CL263. Rivet gun spacers are available free of charge. Special long mandrel alloy rivets are also available for CL211 Mk2.



Fairlead cleats for ropes to 6mm (1/4")

	mm Ø inch Ø	A	B	C	mm Ø inch Ø	mm Ø Gauge	Gms Ozs
Racing Junior Mk2							
CL211Mk2	3 - 6	55	27	16	M4	4.2	23
CL211Mk2 AN (Aluminium)	1/8-1/4	2 1/8	1 1/16	5/8	#8	No8	0.8
Racing Junior Mk2 with Becket							
CL211Mk2/S2	3 - 6	55	27	16	M4	4.2	23
CL211Mk2AN/S2 (Aluminium)	1/8-1/4	2 1/8	1 1/16	5/8	#8	No8	0.8
Mk2 Nylon Junior							
CL272	3 - 6	55	27	16	M4	4.2	10
CL272W	1/8-1/4	2 1/8	1 1/16	5/8	#8	No8	0.35

The AN suffix indicates a superior Hard Anodised finish.






CKC Cleats & Accessories CL815, CL817 & CL819

	mm Ø inch Ø	mm Ø inch Ø	mm Ø Gauge	Gms Ozs
Keeper CL815 (Acetal) for CL211Mk2, CL211Mk2AN, CL211Mk2/S2 & CL211Mk2AN/S2	4 5/32	M4 #8	4.2 No8	9 0.3
Cage CL817 (Nylon & Stainless steel) for CL211Mk2, CL211Mk2AN Requires CL815 Keeper	4 5/32	M4 #8	-	23 0.8
Tapered Pad CL819 (Polypropylene) for CL211Mk2, CL217Mk2, CL218Mk2 & CL211Mk2/S2	4 5/32	M4 #8	4.2 No8	8 0.3
CKC Cleat CL211Mk2 X 2	5 3/16	M5 #10	4.8 No10	150 5.3
CL825CKC				
CKC Cleat CL211Mk2				
CL830CKC	4 5/32	M4 #8	4.2 No8	62 2.2
CKC Cleat CL211Mk2				
CL832CKC	4 5/32	M4 #8	4.2 No8	51 1.8
CL832CKCAN				



Cages CL816 and CL817 with wear resistant stainless steel allow easy cleating at extreme angles.

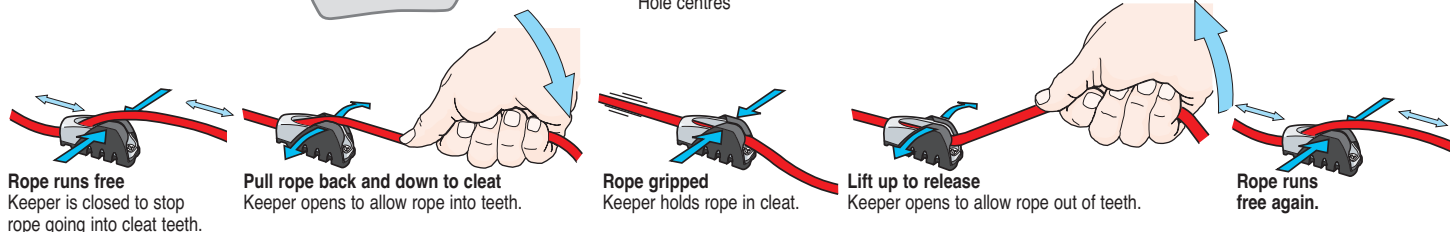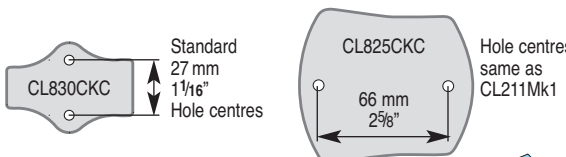

Rope runs free
Keeper is closed to stop rope going into cleat teeth.

Pull rope back and down to cleat
Keeper opens to allow rope into teeth.

Rope gripped
Keeper holds rope in cleat.

Lift up to release
Keeper opens to allow rope out of teeth.

Rope runs free again.