




Passascotte in nylon - Pulegge

INTERASSE FORI mm	Ø FORI mm	MAX Ø SCOTTA mm		MAX ROPE Ø IN.	HOLES Ø IN.	HOLES SPACING IN.
42	5	14	36.01	9/16	3/16	15/8
33	5	12	36.02	7/16	3/16	11/4
26	4	8	36.03	5/16	5/32	1
19	3	6	36.04	1/4	1/8	3/4
37	5	14	36.05	9/16	3/16	17/16
37	5	12	36.06	7/16	3/16	17/16
32	5	10	36.09	3/8	3/16	11/4
22	4	6	36.10	1/4	5/32	7/8

Con boccola in acciaio inox
With stainless steel insert

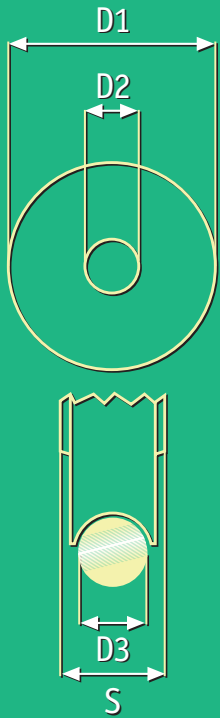

A (nylon - delrin®)

	D1 mm IN.	D2 mm IN.	D3 mm IN.	S mm IN.
21.01	22 7/8	8,2 11/32	8 5/16	13,2 17/32
21.02	25 1	8,2 11/32	5 3/16	6,4 1/4
21.03	25 1	8,2 11/32	8 5/16	10 3/8
21.04	27 11/16	8,2 11/32	10 3/8	15 19/32
21.06	33,5 15/16	8,2 11/32	10 3/8	13 1/2
21.07	38 1 1/2	8,2 11/32	8 5/16	10 3/8
21.08	45 1 3/4	8,2 11/32	10 3/8	13,4 17/32
21.09	53 2 1/16	8,2 11/32	10 3/8	15,7 5/8
21.10	54 2 3/16	8,2 11/32	12 7/16	17,5 1 1/16

B (delrin® con calotte e sfere inox) (delrin® with s/s balls and covers)

	D1 mm IN.	D2 mm IN.	D3 mm IN.	S mm IN.
21.15	28 1 1/16	5,3 13/64	10 3/8	14,6 9/16
21.16	34 1 5/16	5,3 13/64	12 7/16	18,3 23/32
21.17	34 1 5/16	5,3 13/64	8 5/16	10,9 27/64
21.18	45 1 3/4	8,8 11/32	10 3/8	14,6 9/16
21.19	57 2 1/4	8,8 11/32	12 7/16	18,3 23/32

(lega leggera anodizzata dura a spessore + PTFE con inserto plastico)

C (Hardcote + PTFE anodised aluminium with plastic insert)

	D1 mm IN.	D2 mm IN.	D3 mm IN.	S mm IN.
21.30	25 1	8,2 11/32	2,5 3/32	6,8 1/4
21.31	25 1	8,2 11/32	4 5/32	9,8 3/8
21.32	34 1 5/16	8,2 11/32	4 5/32	10,8 7/16
21.33	40 1 9/16	8,2 11/32	5 3/16	10,2 13/32
21.34	45 1 3/4	8,2 11/32	5 3/16	13,6 9/16
21.35	55 2 3/16	8,2 11/32	6 1/4	18 23/32

Fairleads & bullseyes - Sheaves



B



A

