M5
#10 (3/16")

4.8mm
No.10

Ø3-6mm
1/8"-1/4"

2 off Ø11
with 90deg CSK

55.0

12.0

2 off Ø5.5

66.5

Same hole centres as CL211 Mk1
Section B-B

11.3

11.3

25.0

25.0

9.0°

24.7

Section A-A

A   A
B   B

78

88
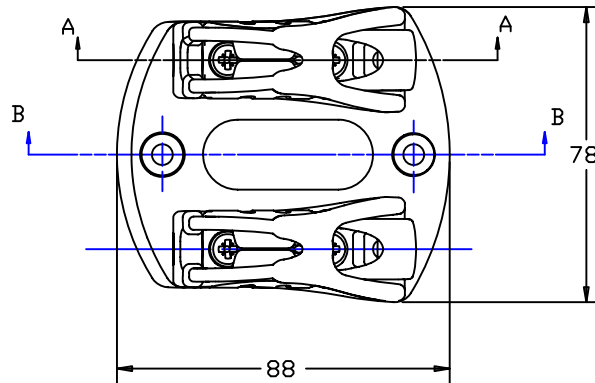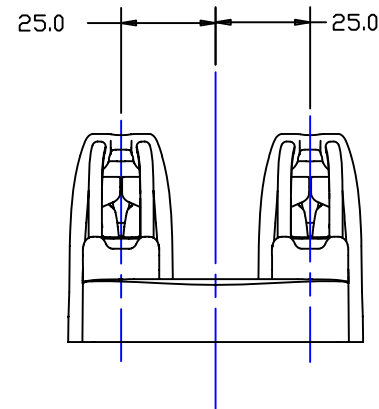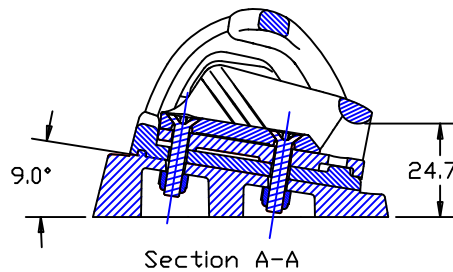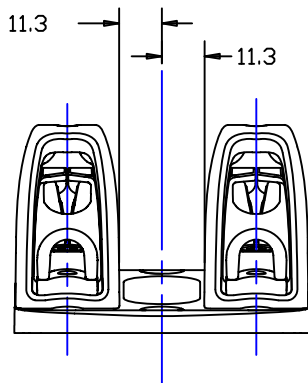
Instructions and
compatible cleats
on page 2

Scale 1:2
All dimensions in mm.

Clamcleats Limited
Watchmead
Welwyn Garden City
Hertfordshire AL7 1AP
England

Telephone +44 (0)1707 330101
Fax +44 (0)1707 321269
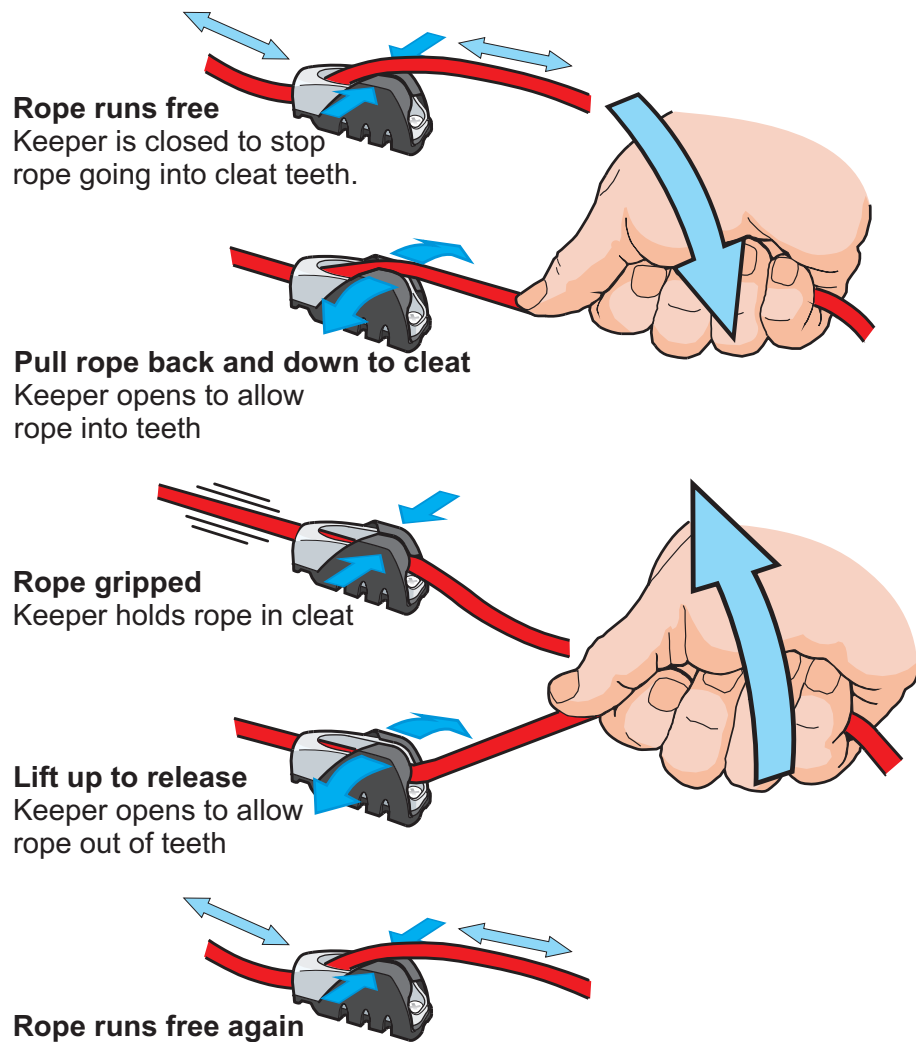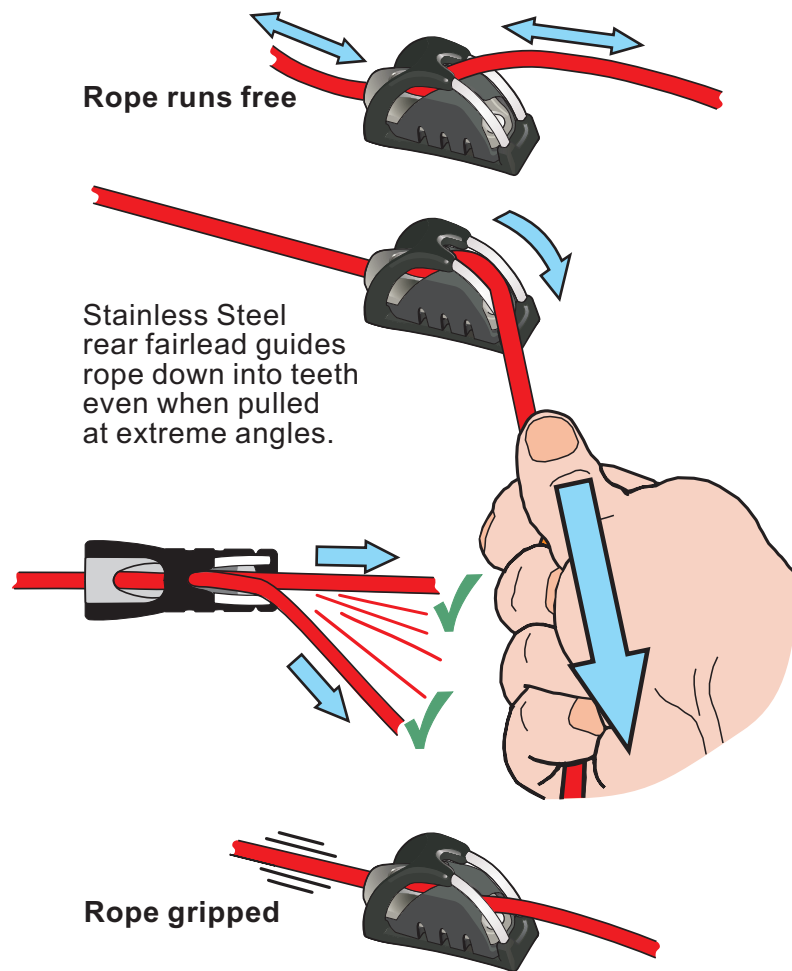http://www.clamcleat-rope-cleats.com

Clamcleat
Rope cleats

Installation Drawing for:-

CL825CKC

XD Twin Training Cleat

Keeper works like this -

Rope runs free
Keeper is closed to stop
rope going into cleat teeth.

Pull rope back and down to cleat
Keeper opens to allow
rope into teeth

Rope gripped
Keeper holds rope in cleat

Lift up to release
Keeper opens to allow
rope out of teeth

Rope runs free again

Cage & rear fairlead works like this -

Rope runs free

Stainless Steel
rear fairlead guides
rope down into teeth
even when pulled
at extreme angles.

Rope gripped

Clamcleat ®
Rope cleats

Installation Drawing for:-

CL825CKC

XD twin training cleat