



# Mk2 Junior cleat range Nylon and Aluminium

- Small, neat and lightweight for 3 - 6mm 1/8" - 1/4" rope.
- Advanced tooth technology to hold all types of small rope.
- Can be fixed with standard screws and rivets, on tubular or flat surfaces.

**Some Applications** - Window blinds (cord control). Canoes (seat & rudder lines). Control lines on dinghies. Kitesurfing (Brake Line adjustment).

## Open Cleat




Aluminium or Nylon

Compact to fit into small locations. Ideal when a rope is not always cleated.


## Fairlead Cleat



Aluminium or Nylon




Fairlead strengthens cleat and allows quick fine adjustments of the rope. Helps hold rope into teeth when a line is flogging.

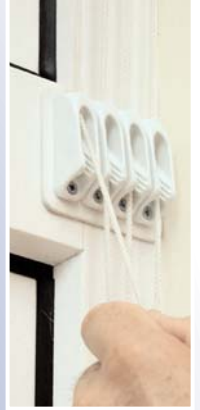

## Fairlead Cleat with Becket



Aluminium only

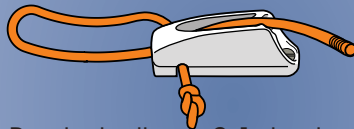

Becket allows 2:1 rigging.



## Side entry Cleat




Aluminium only

**1. Rope runs free**  
Keeper is closed to stop rope going into cleat teeth


**2. Pull rope back and down to cleat**  
Keeper opens to allow rope into teeth

**3. Rope gripped**  
Keeper holds rope in cleat


**4. Lift up to release**  
Keeper opens to allow rope out of teeth

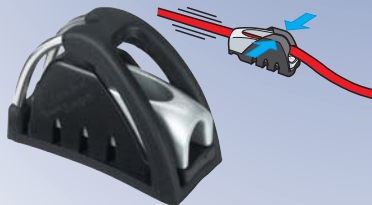

Cage allows easy cleating at extreme angles.



Tapered Pad allows correct alignment. Cleats can be mounted either way round. Backplate provides support on thin deck sections.






# Mk2 Junior cleat range Nylon and Aluminium

## Material Selection

**Nylon cleats** offer very good value for money and are ideal where high loads or rope surges are not likely to be encountered.

**Aluminium cleats** are unaffected by the heat generated by a rope surging back through a cleat. Suitable for sub-zero temperatures. Good corrosion resistance.

The **Hard Anodised (AN)** finish gives a high-tech and fashionable appearance as well as offering superior resistance to sea water corrosion.

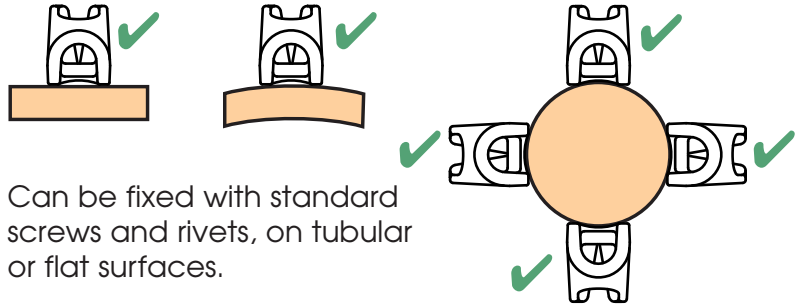

Can be fixed with standard screws and rivets, on tubular or flat surfaces.

Cleats for ropes to 6mm (1/4")	mm Ø inch Ø	A B C			mm Ø inch Ø	mm Ø inch Ø	mm Ø Gauge	Gms Ozs
		mm Ø	mm Ø	mm Ø				
<b>CL204 &amp; CL204W White Mini</b>	3 - 6 1/8-1/4	Nylon			3.2 1/8	#8 4	4.2 No8	9 0.3
		A52	B36	C17				
<b>CL211 Mk2 &amp; CL211 Mk2AN Hard Anodised Racing Junior Mk2</b>	3 - 6 1/8-1/4	Aluminium			3.2 1/8	#8 4	4.2 No8	21 0.8
		A2 1/8	B1 7/16	C1 1/16				
<b>CL211Mk2/S2 &amp; CL211Mk2AN/S2 Hard Anodised Racing Junior Mk2 with Becket</b>	3 - 6 1/8-1/4	Aluminium			3.2 1/8	#8 4	4.2 No8	21 0.8
		A55	B27	C17				
<b>CL217 Mk2 &amp; CL217 Mk2AN Hard Anodised Side entry (Starboard)</b>	3 - 6 1/8-1/4	Aluminium			3.2 1/8	#8 4	4.2 No8	24 0.8
		A2 1/8	B1 1/16	C1 1/16				
<b>CL218 Mk2 &amp; CL218 Mk2AN Hard Anodised Side entry (Port)</b>	3 - 6 1/8-1/4	Aluminium			3.2 1/8	#8 4	4.2 No8	24 0.8
		A55	B27	C17				
<b>CL222 &amp; CL222AN Hard Anodised Racing Mini</b>	3 - 6 1/8-1/4	Aluminium			3.2 1/8	#8 4	4.2 No8	16 0.6
		A48	B36	C15				
<b>CL272 &amp; CL272W White Nylon Mk2 Junior</b>	3 - 6 1/8-1/4	Nylon			3.2 1/8	#8 4	4.2 No8	12 0.4
		A55	B27	C17				
<b>CL815 Keeper</b> for CL211 Mk2, CL211 Mk2AN, Mk2/S2, CL211 Mk2AN/S2 & CL272	3 - 6 1/8-1/4	Acetal			3.2 1/8	#8 4	4.2 No8	9 0.3
		A -	B -	C -				
<b>CL817 Cage</b> for CL211 Mk2, CL211 Mk2AN & CL272	-	Nylon & Stainless steel			-	-	-	23 0.8
		A -	B -	C -				
<b>CL802 Tapered Pad</b> for CL204 & CL222	3 - 6 1/8-1/4	Polypropylene			3.2 1/8	#8 4	4.2 No8	4 0.1
		A 57	B -	C21				
<b>CL819 Tapered Pad</b> for CL211 Mk2, CL217 Mk2, CL218 Mk2, CL211 Mk2/S2 & CL272	3 - 6 1/8-1/4	Polypropylene			3.2 1/8	#8 4	4.2 No8	8 0.3
		A60	B27	C23				
		A2 3/8	B1 1/16	C2 9/32				