


Insert Cleats	mm Ø inch Ø	mm inch			Gms Ozs
		A	B	C	
Insert Cleat with Fairlead CL243/L (Nylon)	3 - 6 1/8-1/4	42 1 21/32	-	22 7/8	10 0.4
Insert Cleat with Fairlead CL244/L (Aluminium)	3 - 5 1/8-3/16	42 1 21/32	-	22 7/8	18 0.6
Twin Insert Cleat CL710 (Aluminium)	3 - 6 1/8-1/4	48 1 7/8	-	13 1/2	18 0.6
Small Insert Cleat CL712 (Aluminium)	3 - 5 1/8-3/16	28 1 1/8	-	11 7/16	7 0.2
Insert Cleat CL715 (Aluminium)	3 - 5 1/8-3/16	9 3/8	-	12 7/16	3 0.1
Very Small Insert Cleat CL716 (Aluminium)	3 - 4 1/8-5/32	24 1 5/16	-	11 7/16	4 0.11



Sail Cleats	mm Ø inch Ø	mm inch			mm Ø inch Ø	Gms Ozs
		A	B	C		
Leech Line Cleat CL212 (Nylon)	2 - 5 1/16-3/16	70 2 3/4	49 1 15/16	21 1 3/16	4 5/32	9 0.3
Shield for CL212 CL212A (Nylon)	-	71 2 3/4	49 1 15/16	29 1 1/8	4 5/32	4 0.1
Backplate for CL212 CL212BP (Nylon)	-	70 2 3/4	49 1 15/16	21 1 3/16	-	2 0.08
Backplate Black for CL241AN, CL258AN, CL259AN & CL273AN CL212BP-B (Nylon)	-	70 2 3/4	49 1 15/16	21 1 3/16	-	2 0.08
Fine Line Cleat (Starboard) CL214W (Nylon)	2 - 5 1/16-3/16	70 2 3/4	49 1 15/16	21 1 3/16	4 5/32	9 0.3
Dinghy Leech Line Cleat CL221 (Nylon)	0 - 3 0-1/8	43 1 3/4	33 1 3/16	17 1 1/16	3 1/8	4 0.1
Sail Line Cleat CL233 (Nylon)	2 - 6 1/16-1/4	57 2 1/4	-	34 1 5/16	-	8 0.3
Backplate CL233BP (Nylon) for CL233	-	57 2 1/4	-	34 1 3/8	-	2 0.08
Racing Sail Line Cleat (Port) CL241+ PR CL241AN (Aluminium)	3 - 6 1/8-1/4	70 2 3/4	49 1 15/16	21 1 3/16	4 5/32	16 0.6
Racing Fine Line (Starboard) CL258 CL258AN (Aluminium)	3 - 6 1/8-1/4	70 2 3/4	49 1 15/16	21 1 3/16	4 5/32	19 0.7
Racing Fine Line (Port) CL259 CL259AN (Aluminium)	3 - 6 1/8-1/4	70 2 3/4	49 1 15/16	21 1 3/16	4 5/32	19 0.7
Sail Edge Cleat CL267 (Nylon + Aluminium)	2 - 4 1/16-5/32	50 2	-	37 1 7/16	4 5/32	12 0.42
Sail Edge Cleat CL269 (Nylon)	2 - 4 1/16-5/32	50 2	-	37 1 7/16	4 5/32	10 0.35
Racing Sail Line Cleat (Starboard) CL273 CL273AN (Aluminium)	3 - 6 1/8-1/4	70 2 3/4	49 1 15/16	21 1 3/16	4 5/32	16 0.6

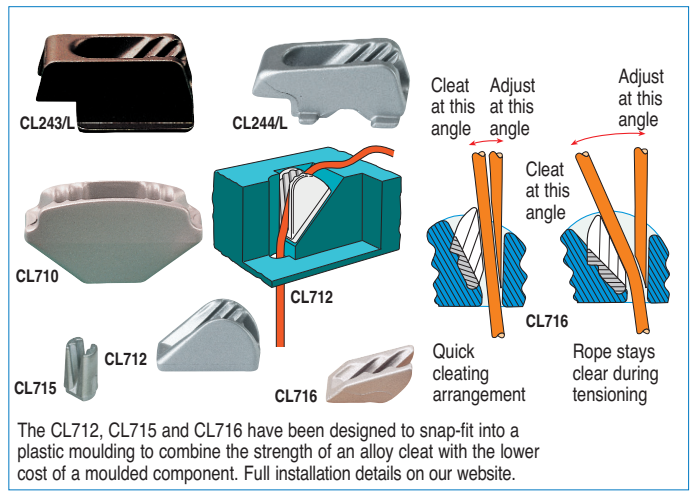

Alternative position for CL212 (or CL258) also CL214W and CL259.

CL221
The CL221 is supplied complete.

CL233

CL267 & CL269
The CL267 is an alloy cleat inside a wrap-round nylon moulding. The CL269 is all nylon.

CL267 and CL269 can be rivetted or sewn.

CL241 & CL273 These also have alternative uses on rigid surfaces.

Most cleats can be sewn or rivetted. **Always sew cleats onto carbon sails.**

Most cleats are available with or without backplates and rivets.

The **CL212A** shield prevents the **CL212** and **CL258** snagging in shrouds or other parts of the rigging.