





# Cleats for Hammocks

A range of cleats for tensioning hammock support ropes, tarp support cords, guylines and shockcord tension cords.  
**Six sizes available for ropes up to 8mm (5/16").**

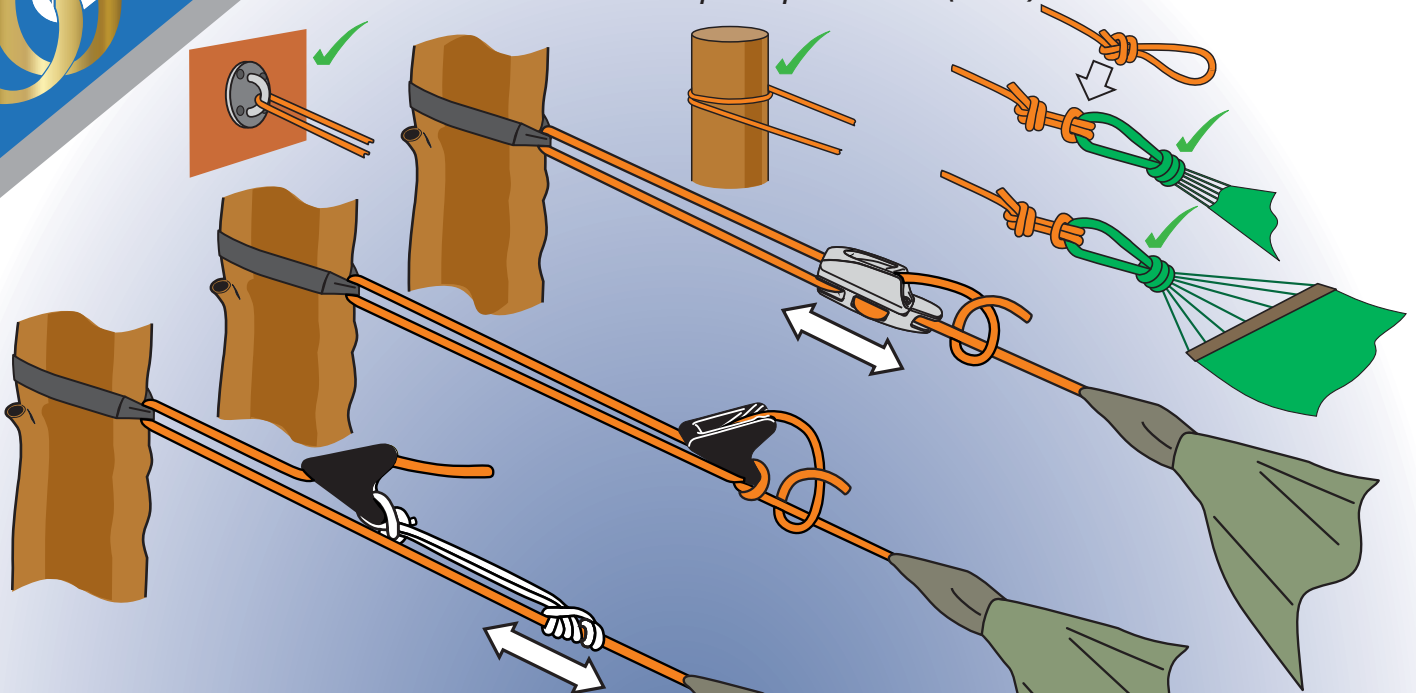

CL276, CL271,  
 CL826-72 or  
 CL826-11AN

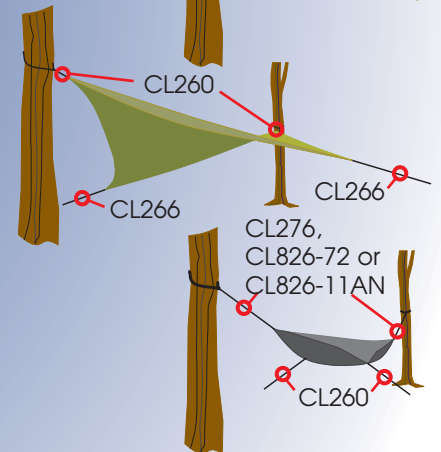

CL266 and CL260, ideal for lightweight shelters using small diameter lines.


CL276 and CL271 are for hammocks and larger material or canvas structures. They can hold up to 150 Kg (300 lbs).





CL826-72 and CL826-11AN can hold loads from 70 Kg (150 lbs) up to 180 Kg (400 lbs).





# Cleats for Hammocks

RIGGING and TECHNICAL INFORMATION

<p><b>CL266</b> 21.3mm 27/32"</p> <p>1-3mm<math>\varnothing</math> 3/64-1/8"</p> <p>0.74gms 0.03oz</p> <p>Max working load <b>10kg 22lbs</b></p> <p>✓ Glow in the dark</p> 	<p><b>CL260</b> 31mm 1 1/4"</p> <p>2-5mm<math>\varnothing</math> 1/16-3/16"</p> <p>2.2gms 0.08oz</p> <p>Max working load <b>30kg 66lbs</b></p> <p>✓ Glow in the dark</p> <p>✓ Holds shockcord</p>	<p><b>CL276</b> 47mm 1 7/8"</p> <p>3-6mm<math>\varnothing</math> 1/8-1/4"</p> <p>9.6gms 0.34oz</p> <p>Max working load using 6mm<math>\varnothing</math> (1/4") rope is <b>150kg 330lbs</b></p> <p>✓ Excellent value</p> <p>✓ Light weight</p>	<p><b>CL271</b> 67mm 2 5/8"</p> <p>4-8mm<math>\varnothing</math> 5/32-5/16"</p> <p>28.0gms 0.98oz</p> <p>Max working load using 8mm<math>\varnothing</math> (5/16") rope is <b>150kg 330lbs</b></p> <p>✓ Holds larger hammock ropes</p>
---	---	--	---

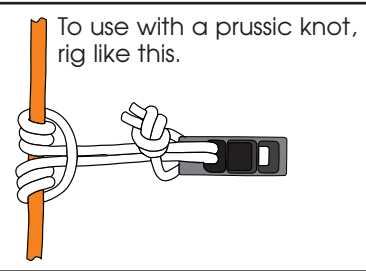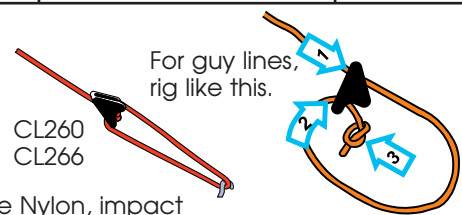

Exterior grade Nylon, impact and UV resistant for hot deserts to arctic conditions.

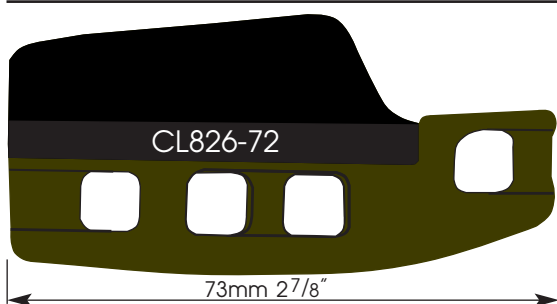

**Use above freezing.**




Nylon cleat. Composite base.

✓ Easy to adjust along rope.

4-6mm $\varnothing$   
5/32-1/4"

23.0gms  
0.80oz

Max working load using 6mm $\varnothing$  (1/4") rope is **120kg 260lbs**

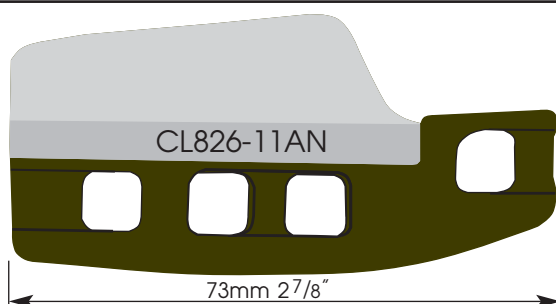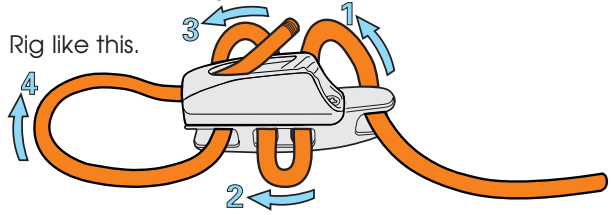

Alloy cleat. Composite base.

✓ Alloy cleat - ultimate strength.

✓ Easy to adjust along rope.

4-6mm $\varnothing$   
5/32-1/4"

34.0gms  
1.20ozs

Max working loads using 4mm $\varnothing$  (5/32") rope is **70kg 150lbs**. Using 5mm $\varnothing$  (3/16") rope is **150kg 330lbs**. Using 6mm $\varnothing$  (1/4") rope is **180kg 400lbs**

