


DIN 6912

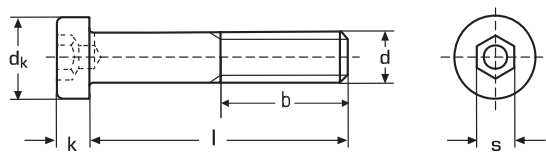

Болт с низкой цилиндрической головкой
Нержавеющая сталь A2 (AISI 304)/A4 (AISI 316)

b	14,0	16,0	18,0	22,0	26,0	30,0	38,0	42,0	54,0
s	3,0	4,0	5,0	6,0	8,0	10,0	14,0	14,0	19,0
k	2,8	3,5	4,0	5,0	6,5	7,5	10,0	11,0	14,0
dk	7,0	8,5	10,0	13,0	16,0	18,0	23,67	27,0	36,0

d	M 4	M 5	M 6	M 8	M 10	M 12	M 16	M 18	M 24
l 6	0,090	0,140							
8	0,110	0,190	0,330						
10	0,130	0,220	0,360	0,720					
12	0,150	0,250	0,390	0,770					
14	0,170	0,280	0,420	0,820					
16	0,190	0,310	0,450	0,880	1,550	2,230			
18	0,210		0,485						
20	0,230	0,370	0,520	1,020	1,790	2,550			
25	0,270	0,440	0,620	1,250	2,020	2,950	5,650		
30	0,320	0,510	0,730	1,400	2,200	3,250	6,300	10,800	
35	0,340	0,580	0,830	1,570	2,550	3,650	6,970	11,800	
40	0,420	0,660	0,950	1,750	2,850	4,000	7,870	12,800	
45		0,705	1,050	1,950	3,060	4,389	8,050	13,900	
50		0,730	1,150	2,150	3,480	4,800	9,150	15,000	22,800
55			1,265	2,350	3,730	5,350	9,950	16,100	
60		0,900	1,360	2,530	4,030	5,700	10,700	17,200	26,300
65			1,465					18,400	
70		1,070	1,570	2,910	4,600	6,500	12,200	19,600	29,800
80			1,740	3,280	5,250	7,200	14,000	22,200	33,300
90				3,300	5,780	8,000	15,400	24,500	36,900
100				4,000	6,310	8,800	16,900	26,900	40,700
110									43,900
120								31,600	47,400
130									
140							22,600		54,500
150							24,200		58,000
	500	500 от 45 l 200	200 от 50 l 100	200 от 45 l 100	100 от 50 l 50	50 от 80 l 25	25	25	25

Вес 100 шт./кг