


# DIN 6330

ГОСТ 15523

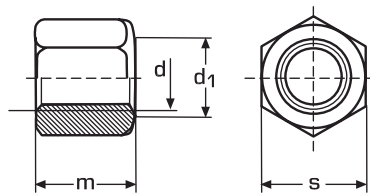


## Гайка шестигранная высота - 1,5d

Нержавеющая сталь A2 (AISI 304)/A4 (AISI 316)

d	Вес 100 шт./кг	s	e	m	d1	
ВМ 8	0,960	13,0	14,38	12,0	9,0	100
ВМ 10	2,100	16,0	17,77	15,0	11,5	100
ВМ 12	3,150	18,0	20,03	18,0	14,0	100
ВМ 16	6,100	24,0	26,75	24,0	18,0	100
ВМ 20	12,000	30,0	33,53	30,0	22,0	50
ВМ 24	20,600	36,0	39,98	36,0	26,0	50
ВМ 30	41,900	46,0	51,28	45,0	32,0	25
ВМ 36	71,500	55,0	61,31	54,0	38,0	25
ВМ 42	117,000	65,0	72,61	63,0	44,0	10

# DIN 6331

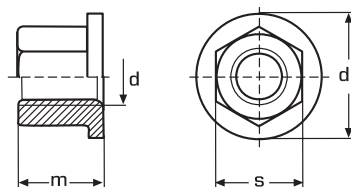

## Гайка шестигранная высота - 1,5d с фланцем

Нержавеющая сталь A2 (AISI 304)/A4 (AISI 316)

d	Вес 100 шт./кг	s	e	m	d1	a	
М 6	0,550	10,0	11,05	9,0	14,0	3,0	100
М 8	1,240	13,0	14,38	12,0	18,0	3,5	100
М 10	2,550	16,0	17,77	15,0	22,0	4,0	100
М 12	3,650	18,0	20,03	18,0	25,0	4,0	50
М 16	7,100	24,0	26,75	24,0	31,0	5,0	50
М 20	13,500	30,0	33,53	30,0	37,0	6,0	50
М 24	23,000	36,0	39,98	36,0	45,0	6,0	25
М 30	47,000	46,0	51,28	45,0	58,0	8,0	25
М 36	81,000	55,0	61,31	54,0	68,0	10,0	10