


DIN 980

ISO 7042



Гайка самоконтрящаяся

Нержавеющая сталь A2 (AISI 304)/A4 (AISI 316)


d	Вес 100 шт./кг	s	e	m	
M 3	0,034	5,5	6,01	2,4	1000
M 4	0,081	7,0	7,66	3,2	1000
M 5	0,123	8,0	8,79	4,0	500
M 6	0,250	10,0	11,05	5,0	200
M 8	0,520	13,0	14,38	6,5	100
M 10	1,170	17,0	18,9	8,0	50
M 12	1,730	19,0	21,1	10,0	50
M 14	2,500	22,0	24,49	11,0	50
M 16	3,330	24,0	26,75	13,0	50
M 18	4,940	27,0	29,56	15,0	25
M 20	6,440	30,0	32,95	16,0	25

Вес 100 шт./кг

DIN 982

Гайка самоконтрящаяся высокая с нейлоновым стопорным кольцом

Нержавеющая сталь A2 (AISI 304)/A4 (AISI 316)

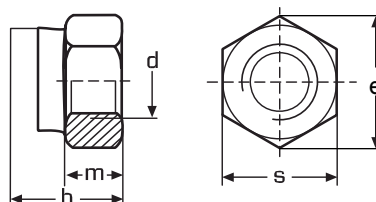

d	Вес 100 шт./кг	s	e	m	h	
M 4	0,100	7,0	7,66	3,6	4,7	200
M 5	0,140	8,0	8,79	4,4	6,3	200
M 6	0,310	10,0	11,05	4,9	8,0	200
M 8	0,600	13,0	14,38	6,44	9,5	200
M 10	1,170	17,0	18,9	8,04	11,5	100
M 12	1,660	19,0	21,1	10,37	14,0	50
M 14	2,100	22,0	24,49	12,1	16,0	50
M 16	3,780	24,0	26,75	14,1	18,0	25
M 20	6,800	30,0	32,95	16,9	22,0	25
M 24	12,700	36,0	39,55	20,2	28,0	25